




ANSUL AUTOMAN II-C Releasing Device (For Pneumatic Actuation)

The ANSUL AUTOMAN II-C Releasing Device consists of a metal enclosure which contains a spring-loaded puncture pin release mechanism, an actuation cartridge, electrical circuitry, and an input/output terminal strip for making electrical connections. The ANSUL AUTOMAN II-C releasing device provides automatic pneumatic actuation of the SAPPHIRE System. When wired to an AUTOPULSE Control system, it will provide supervised electric detection and release. It also provides manual actuation using the strike button on the release. When an AUTOPULSE Control System is used, manual actuation is accomplished using an electric manual pull station.

The ANSUL AUTOMAN II-C releasing device requires an
▶ LT-30-R nitrogen cartridge for system actuation. Cartridge must be ordered separately.

Component	Approvals
ANSUL AUTOMAN II-C Releasing Device	UL Listed ULC Listed FM Approved

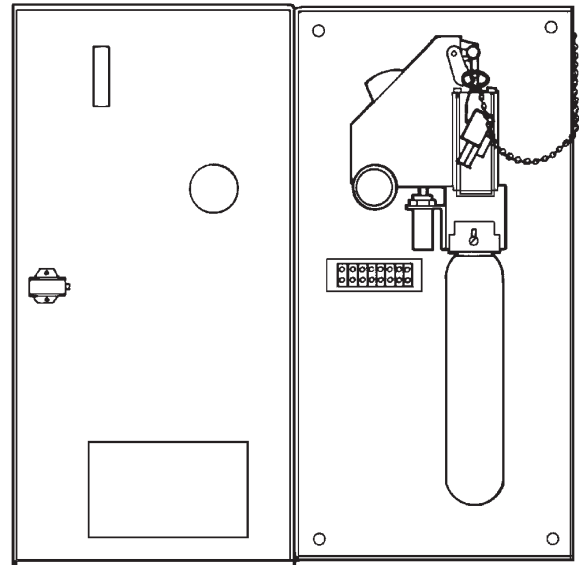

000442

Shipping Assembly Part No.	Description
▶ 17728	ANSUL AUTOMAN II-C Releasing Device
▶ 5373	LT-30-R Nitrogen Cartridge (order separately)
26310	Cocking Lever (order separately)