


FM-200 COMPONENT DESCRIPTION

Effective June 1999

3/8" Check Valve

F-93-5100

FENWAL®

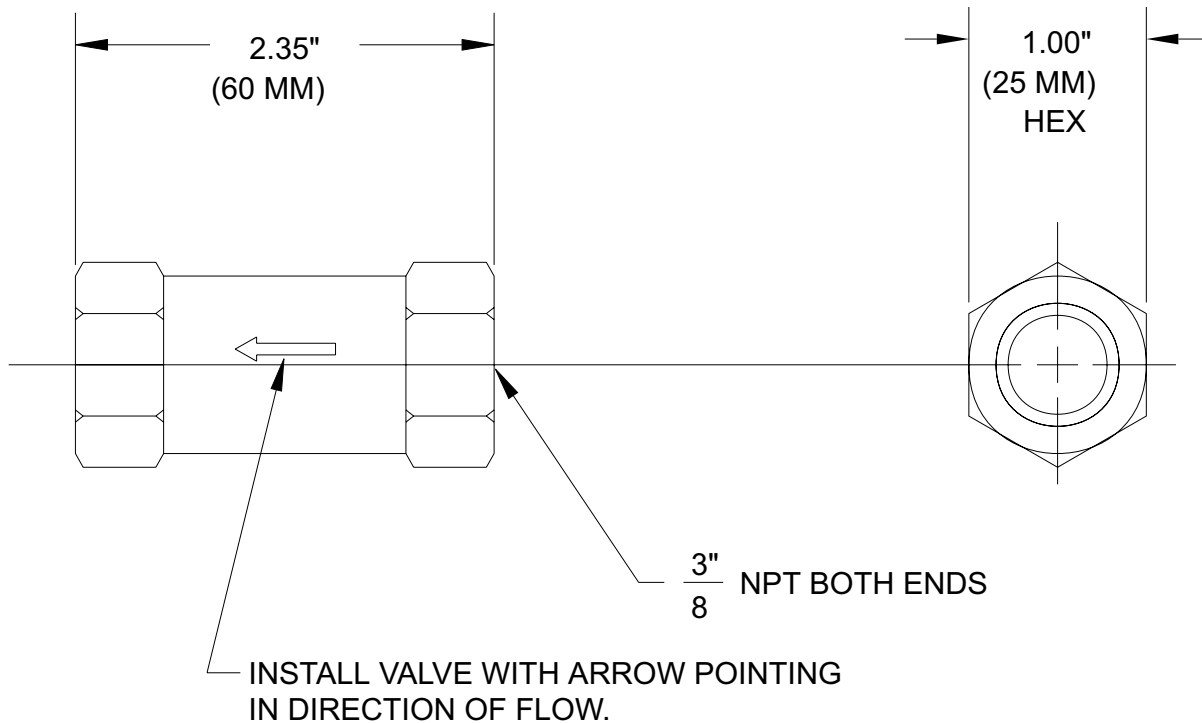

TECHNICAL DATA

WORKING PRESSURE: 0 TO 5000 PSI (0 TO 345 BAR)

PROOF PRESSURE: 10,000 PSI (690 BAR)

CRACKING PRESSURE: 2 TO 4 PSI (.14 TO .28 BAR)

OPERATING TEMPERATURE: -40F TO 250F (-40F TO 121C)

MATERIALS

BODY: BRASS

SEAL: BUNA-N

P/N: 261193

FENWAL®

KIDDE-FENWAL, INC.
400 MAIN STREET, ASHLAND, MA 01721
TEL: (508) 881-2000 FAX: (508) 881-8920
www.fenwalfire.com



This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein. If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721; Telephone (508) 881-2000