

Kidde Engineered Fire Suppression System

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid



Effective: June 2015


1/4 in. Flexible Actuation Hoses

K-45-5070 Rev AC

FEATURES

- *UL Listed for use with Novec 1230 Systems*

P/N: 26498X

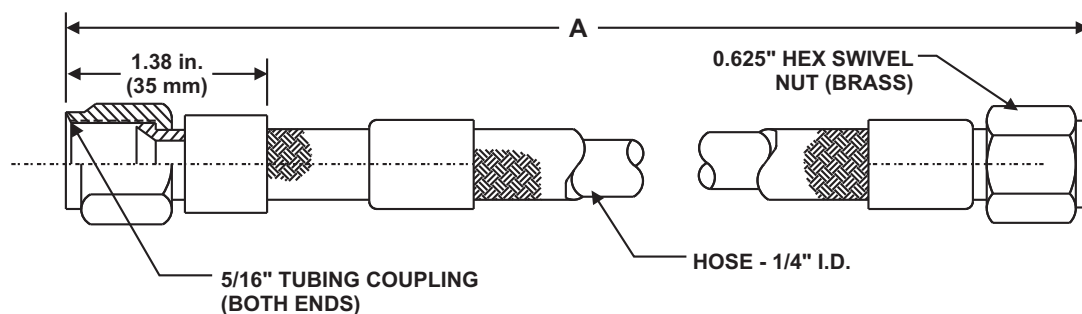

Part Number	Dimension A
264986	30 in. (762 mm)
264987	22 in. (559 mm)

TECHNICAL DATA

- Minimum Burst Pressure: 12000 PSIG
- Operating Pressure: 3000 PSIG
- Test Pressure: 4500 PSIG
- Minimum Bend Radius: 2-1/2 in.

MATERIALS

- Hose: Wire Braided, Teflon® Lining (CRES T304)
- Couplings: Brass

Kidde is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, Inc.