

Kidde Engineered Fire Suppression System

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid



Effective: June 2015


Pressure Trip

K-45-5200 Rev AD

FEATURES

- *UL Listed, ULC Listed, and FM Approved for use with Novec 1230 Systems*

P/N: 81-874290-000

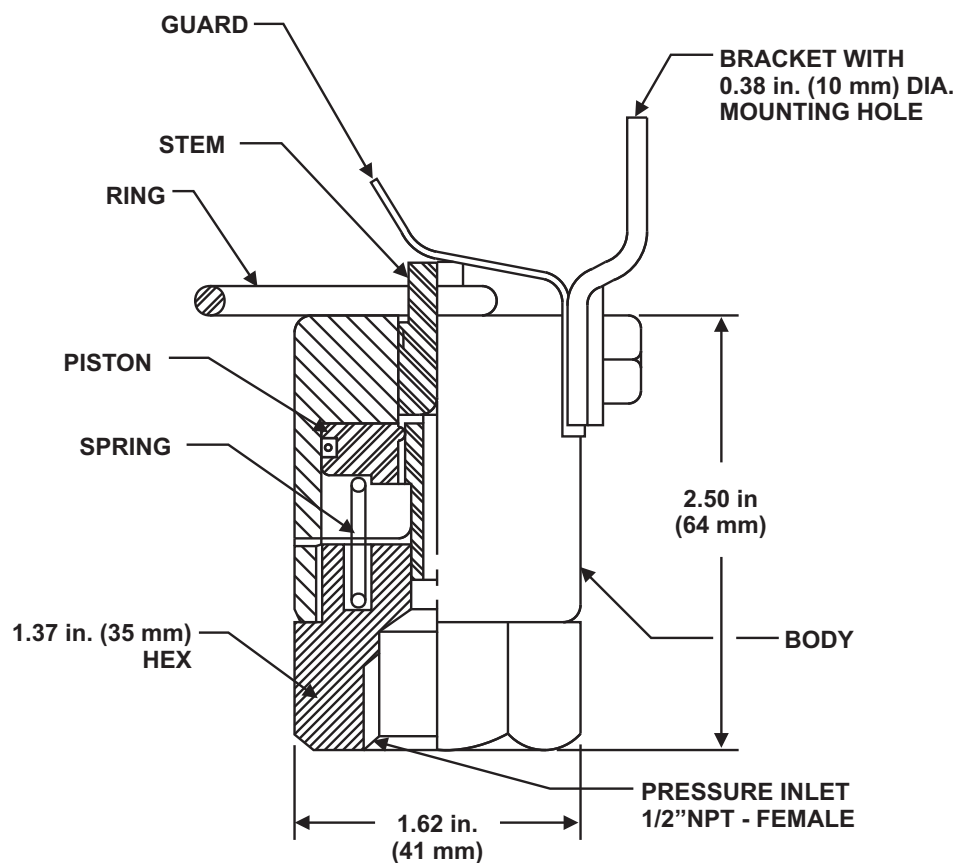

TECHNICAL DATA

- Maximum Load in Ring: 100 lb. (45 kg)
- Minimum Nominal Operating Pressure: 50 PSI (3.5 bar)

MATERIALS

- Body, Bracket, and Piston: Brass
- Guard, Stem, Ring, and Spring: Stainless Steel

Kidde is a registered trademark of Kidde-Fenwal, Inc.

3M and Novec are trademarks of 3M.

All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, Inc.