

Description

The Check Valve & Manifold Coupling (CV Coupling) is used when cylinders are manifolded together per the diagram below.

The CV Coupling is rated at 3000# and can be welded into the manifold inlet directly or connected thru a NPT Nipple.



CP 88122-625


CP 88122-645

CP 88122-665


CV Coupling

Part Number	Coupling Size	Type of Check Valve
CP 88122-625	2-1/2" CV	1" Check Valve
CP 88122-645	3" CV	1-1/2" Check Valve
CP 88122-665	4" CV	2-1/2" Check Valve

Cylinder to Manifold Connections with Threaded Pipe

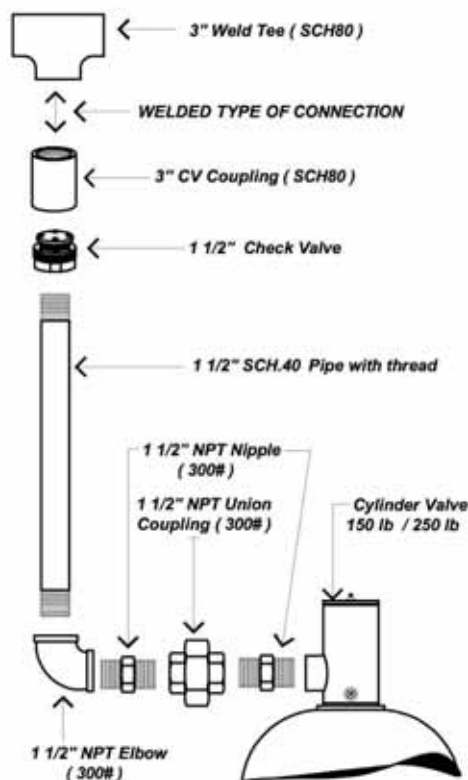

1 1/2" Check Valve Installation without flexible hose
(Welded Type CV Coupling)

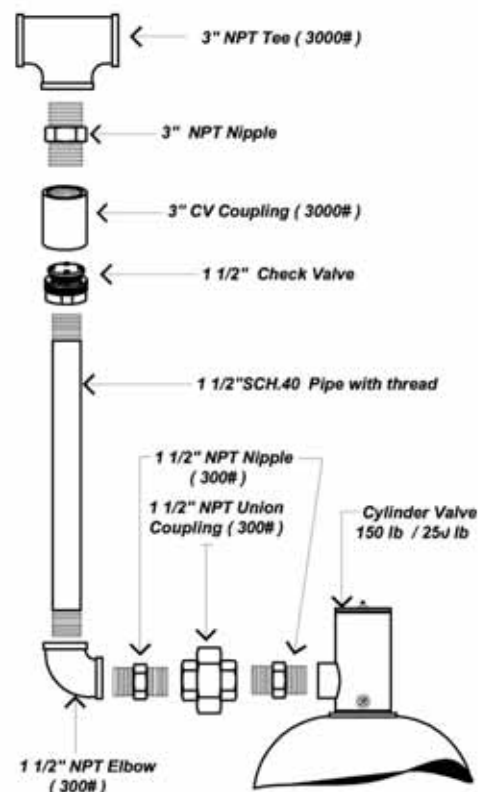

1 1/2" Check Valve Installation without flexible hose
(Screwed Type CV Coupling)