

# FM-200 COMPONENT DESCRIPTION


## 1/4" Flexible Actuation Hoses

F-93-5070

**FENWAL®**

### FEATURES

- FOR USE WITH UL LISTED, ULC LISTED & FMRC APPROVED SYSTEMS

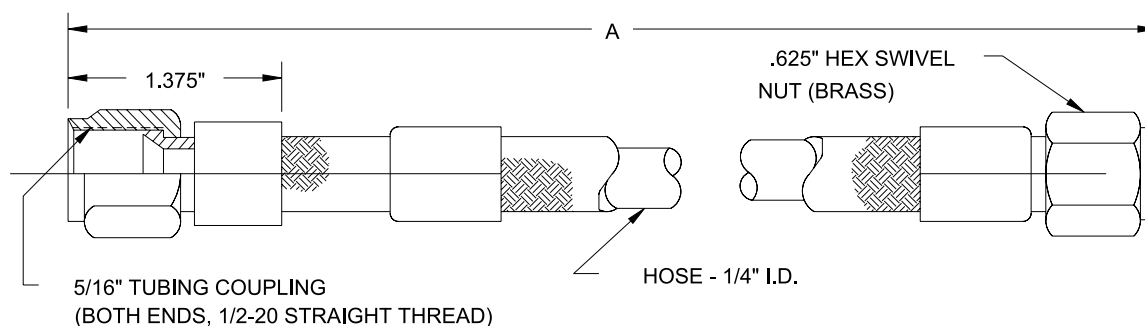

PART NO.	A*
264986	30
264987	22

\* DIMENSIONS ARE IN INCHES

### MATERIALS

HOSE: WIRE BRAIDED, TEFLON LINING (CRES T304)

COUPLINGS: BRASS

MINIMUM BURST PRESSURE: 12,000 PSIG

OPERATING PRESSURE: 3000 PSIG

TEST PRESSURE: 4500 PSIG

MINIMUM BEND RADIUS 2.5"

P/N: 26498x

**FENWAL®**

KIDDE-FENWAL, INC.  
400 MAIN STREET, ASHLAND, MA 01721  
TEL: (508) 881-2000 FAX: (508) 881-8920  
www.fenwalfire.com



This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein.  
If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721; Telephone (508) 881-2000