

# FM-200 COMPONENT DESCRIPTION

Effective June 1999


## Pressure Trip

# FENWAL®

F-93-5200

### FEATURES

- FOR USE WITH UL LISTED, ULC LISTED & FMRC APPROVED SYSTEMS

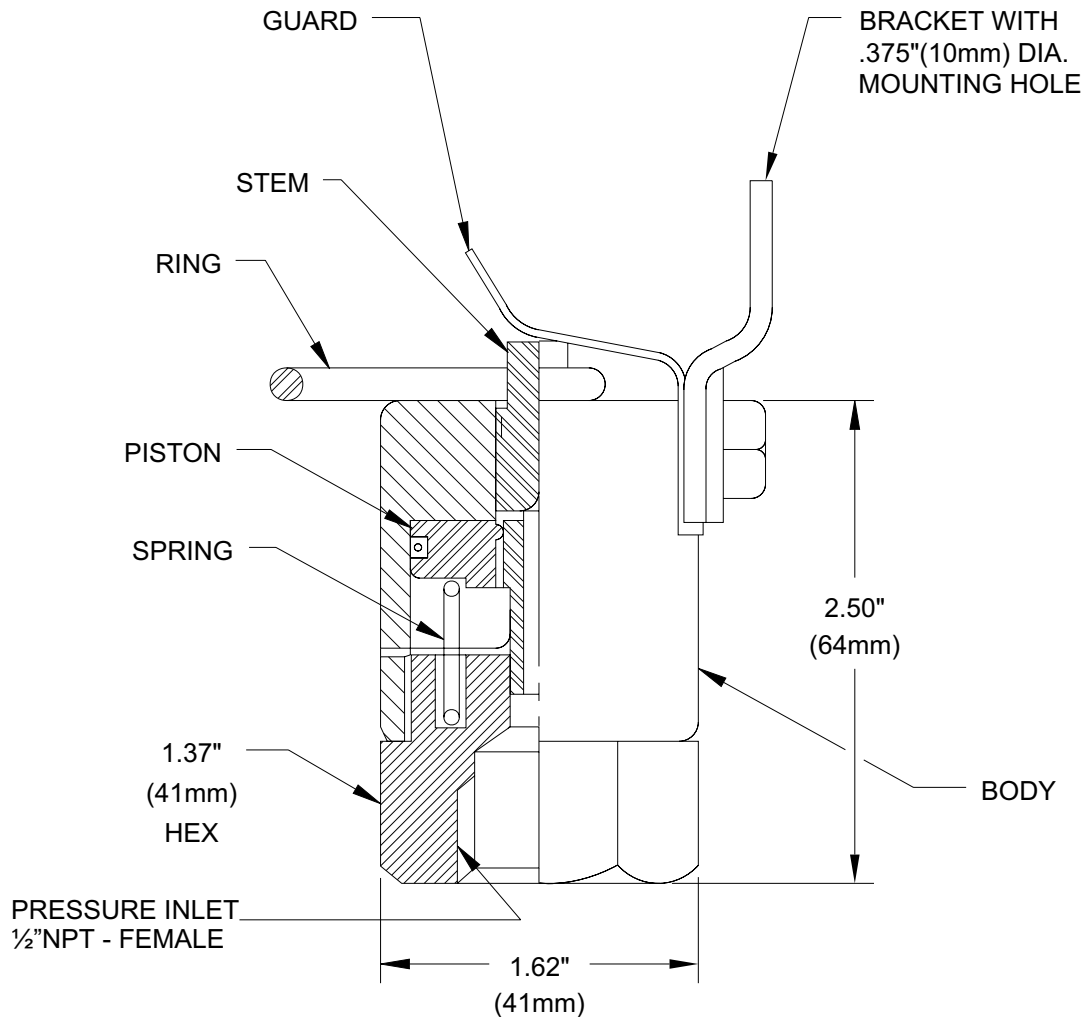

### MATERIALS

BODY, BRACKET, AND PISTON: BRASS

GUARD, STEM, RING AND SPRING: STAINLESS STEEL

**MAXIMUM LOAD ON RING: 100 LBS. (45 KG)**

**MINIMUM NOMINAL OPERATING PRESSURE:  
50 PSI (3.5 BAR)**

P/N: 874290

# FENWAL®

KIDDE-FENWAL, INC.  
400 MAIN STREET, ASHLAND, MA 01721  
TEL: (508) 881-2000 FAX: (508) 881-8920  
www.fenwalfire.com



This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein. If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721; Telephone (508) 881-2000

F-93-5200

©1999 Kidde-Fenwal, Inc. Printed in U.S.A.