

FM-200 COMPONENT DESCRIPTION

Effective June 1999

Electric Control Head, Stackable Explosion Proof

F-93-8017

FENWAL®

FEATURES


- FOR USE WITH UL LISTED, ULC LISTED & FMRC APPROVED SYSTEMS

ELECTRIC CONTROL HEAD, PART NO. 486500-01 IS RATED FOR USE IN HAZARDOUS (CLASSIFIED) LOCATIONS CLASS 1, DIV. I, GROUPS C, D AND CLASS II, DIV. II, GROUPS E, F, G BETWEEN -40F AND 140F. USE CONDUIT SEAL WITHIN 18 IN. (45cm) OF THIS DEVICE.

NOTE:
THIS CONTROL HEAD IS POLARIZED. IMPROPER WIRING WILL RESULT IN FAILURE OF THIS DEVICE TO OPERATE

⚠ WARNING

ELECTRIC CONTROL HEAD, P/N: 486500-01, IS DESIGNED FOR INSTALLATION DIRECTLY ON 487 SERIES HALON AND MODEL 9300 FM-200 VALVES ONLY. THIS CONTROL HEAD MUST NOT BE INSTALLED ON ANY OTHER TYPE OF HALON OR FM-200 CYLINDER VALVE, NITROGEN VALVE, CARBON DIOXIDE CYLINDER VALVE, FE-13 CYLINDER VALVE OR STOP (DIRECTIONAL) VALVE. INSTALLATION OF THIS CONTROL HEAD TO ANY OTHER DEVICE (E.G., PRESSURE OPERATED CONTROL HEAD) WILL RESULT IN FAILURE OF DEVICE TO OPERATE.

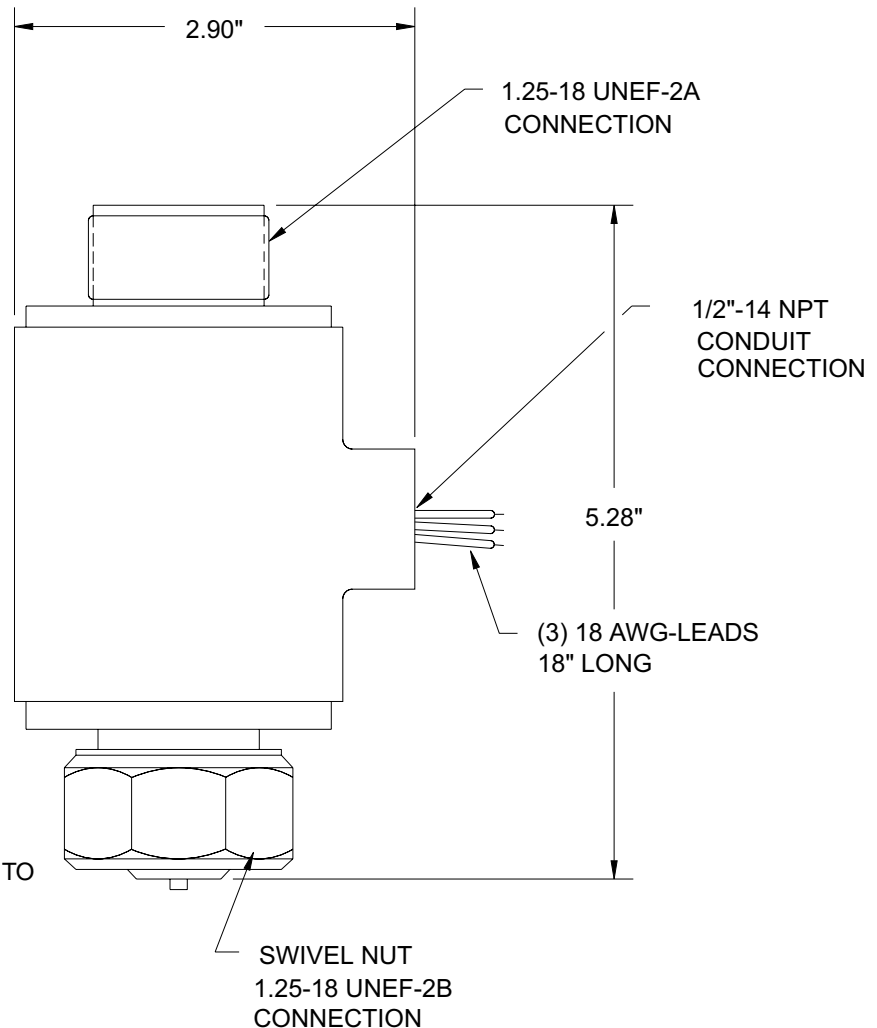

VOLTAGE: 24VDC
CURRENT: 0.2A CONTINUOUS DRAW

P/N: 486500-01

FENWAL®

KIDDE-FENWAL, INC.
400 MAIN STREET, ASHLAND, MA 01721
TEL: (508) 881-2000 FAX: (508) 881-8920
www.fenwalfire.com



This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein. If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721; Telephone (508) 881-2000

F-93-8017

©1999 Kidde-Fenwal, Inc. Printed in U.S.A.