

Kidde Engineered Fire Suppression System

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid
Cylinder and Valve Assemblies, 10 lb. to 70 lb.
Capacity, Vertical Mount Only Data Sheet




Effective: June 2015

K-45-2010 Rev AC

FEATURES

- *UL Listed, ULC Listed, and FM Approved for use with Novec 1230 Systems*

P/N: 45-10000X0-001

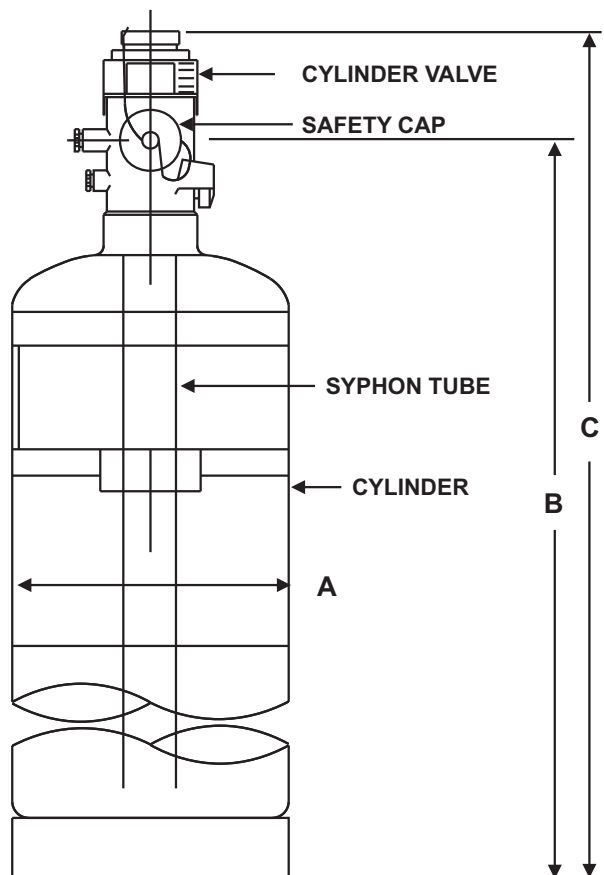

ORDERING INFORMATION

Part Number	Cylinder Size	Dimensions		
		A	B	C
45-100010-001	10 lb.	7.07 in.	13.34 in.	17.30 in.
45-100020-001	20 lb.	7.07 in.	21.01 in.	24.97 in.
45-100040-001	40 lb.	9 in.	22.80 in.	26.76 in.
45-100070-001	70 lb.	9 in.	34.87 in.	38.83 in.

MATERIALS

- Valve Body: Brass
- Cylinder: Steel, Painted Red

Note:

1. The safety cap must be installed on the valve outlet at all times, except when the cylinders are connected to the system piping, or being filled. The safety cap must not be removed from its chain.
2. See K-45-2070 for additional information.
3. Cylinders are vertical mount only.

Kidde is a registered trademark of Kidde-Fenwal, Inc.

3M and Novec are trademarks of 3M.

All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, Inc.