

# Kidde Engineered Fire Suppression System

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid

## Nitrogen Pilot Cylinder, Bracket, and Adapter Data Sheet



Effective: June 2015

K-45-5050 Rev AC

### FEATURES

- *UL Listed, ULC Listed, and FM Approved for use with Novec 1230 Systems*



P/N: 877940

### MATERIAL

- Cylinder: Steel, Painted Black
- Valve: Brass
- Bracket: Steel, Painted Black
- Adapter: Brass

### SPECIFICATIONS

- Cylinder Capacity:  
108 in.<sup>3</sup> (1770 cm<sup>3</sup>)
- Safety Outlet Burst Range:  
2650 to 3000 PSI (183 to 207 bars) at 70°F (21°C)
- Nitrogen:  
NITROGEN-BB-n-411b, Grade A, Type 1  
1800 PSI (124 bars) at 70°F (21°C)

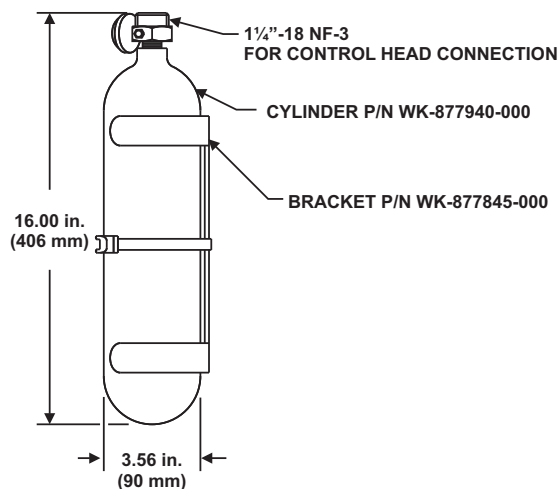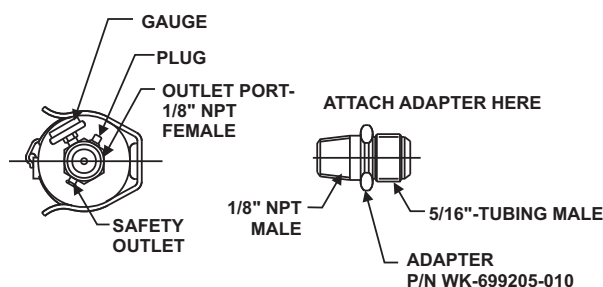

Kidde is a registered trademark of Kidde-Fenwal, Inc.  
3M and Novec are trademarks of 3M.  
All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, Inc.