Kidde Engineered Fire Suppression System

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid



Effective: June 2015


K-45-5160 Rev AC


Discharge Indicators

FEATURES

UL Listed, ULC Listed, and FM Approved for use with Novec 1230 Systems

P/N: 967082 AND 875553

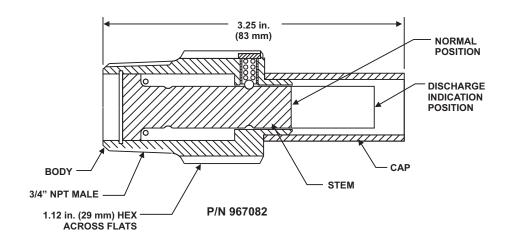

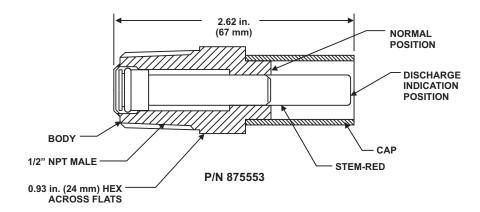

MATERIALS

Valve Body: Brass

Gasket: Iron

Flanges, Bolts, and Nuts: Steel

ORDERING INFORMATION

Part Number	Size	Description
967082	3/4 in.	Brass
875553	1/2 in.	Aluminum

Kidde is a registered trademark of Kidde-Fenwal, Inc. 3M and Novec are trademarks of 3M.

All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, Inc.