## FM-200 COMPONENT DESCRIPTION

Cylinder and Valve Assemblies 10LB (4.5 KG) - 70 LB (31.7 KG) Capacity, Vertical Mount Only




F-93-2010

## **Features**

• For use with UL Listed, ULC Listed & FMRC approved systems

• See Kidde Manual 90-FM200M-021 for USCG Approval

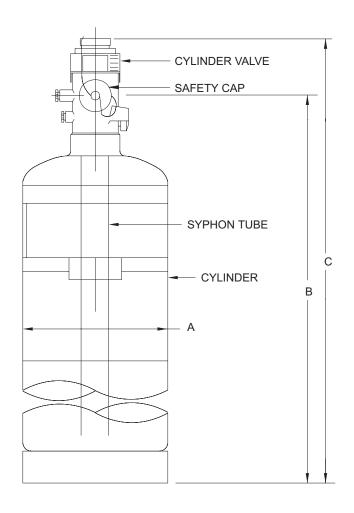

## NOTES:

- 1. THE SAFETY CAP MUST BE INSTALLED ON THE VALVE OUTLET AT ALL TIMES EXCEPT WHEN THE CYLINDERS ARE CONNECTED TO THE SYSTEM PIPING OR BEING FILLED. THE SAFETY CAP MUST NOT BE REMOVED FROM ITS CHAIN.
- 2. SEE F-90-2070 FOR ADDITIONAL INFORMATION.
- 3. CYLINDERS ARE VERTICAL MOUNT ONLY.

## **ORDERING INFORMATION**

Part Number	Cyl. Size	Dimensions		
		<b>A</b> *	В*	C*
93-100010-001	10 Lbs.	7.07	13.34	17.30
93-100020-001	20 Lbs.	7.07	21.01	24.97
93-100040-001	40 Lbs.	9.00	22.80	26.76
93-100070-001	70 Lbs.	9.00	34.87	38.83

<sup>\*</sup> Dimensions are in inches.

MATERIALS
VALVE BODY: BB

VALVE BODY: BRASS

**CYLINDER: STEEL, PAINTED RED** 

P/N: 90-10000X0-001



